

10G BiDi SFP+ 60km Optical Transceiver GBP-xxxx192-E6C

Features

- ◆ Supports 9.95Gb/s to 10.3Gb/s data rates
- ◆ Simplex LC Connector Bi-Directional SFP+ Optical Transceiver
- ◆ Single 3.3V Supply
- ◆ Up to 60km on SMF
- ◆ A:1270nm DFB Laser transmitter,1330nm APD receiver
B:1330nm DFB Laser transmitter,1270nm APD receiver
- ◆ SFP+ MSA SFF-8431 Compliant
- ◆ Digital Diagnostic SFF-8472 Compliant
- ◆ RoHS compliant and Lead Free
- ◆ Operating case temperature range: 0 to 70°C



Applications

- ◆ 10G Ethernet

Product description

The GBP-xxxx192-E6C series single mode transceiver is small form factor pluggable module for duplex optical data communications such as 10GBASE-ER/EW defined by IEEE 802.3ae. It is with the SFP+ 20-pin connector to allow hot plug capability. The GBP-xxxx192-E6C module is designed for single mode fiber and operates at a nominal wavelength of 1270nm or 1330nm;The transmitter section uses a multiple quantum well DFB, which is class 1 laser compliant according to International Safety Standard IEC-60825.The receiver section consists of a APD photodiode integrated with a TIA.

Absolute Maximum Ratings

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

| Parameters | Symbol | Min. | Max. | Unit |
|----------------------------|-----------------|------|------|------|
| Supply Voltage | V _{CC} | -0.5 | +3.6 | V |
| Storage Temperature | T _c | -40 | +85 | °C |
| Operating Case Temperature | T _c | 0 | +70 | °C |
| Relative Humidity | RH | 0 | 85 | % |

Recommended Operating Conditions

| Parameter | Symbol | Min. | Typical | Max | Unit |
|----------------------------|-----------------|------|---------|-----|------|
| Supply Voltage | V _{CC} | 3.0 | 3.3 | 3.6 | V |
| Supply Current | I _{CC} | | 300 | 450 | mA |
| Operating Case Temperature | T _c | 0 | 25 | 70 | °C |
| Module Power Dissipation | P _m | - | 1 | 1.5 | W |

Notes:

[1] Supply current is shared between VCCTX and VCCR_X.

[2] In-rush is defined as current level above steady state current requirements.

Electrical characteristics(T_{OP} = 0 to 70°C, V_{CC} = 3.0 to 3.60 Volts)

| Parameter | Symbol | Min. | Typical | Max | Unit | Ref. |
|--------------------------------|---------------------|-----------------|---------|----------------------|------|------|
| Supply Voltage | V _{CC} | 3.00 | | 3.60 | V | 1 |
| Supply Current | I _{CC} | | 300 | 450 | mA | 1 |
| Transmitter | | | | | | |
| Input differential impedance | R _{in} | | 100 | | Ω | 2 |
| Single ended data input swing | V _{in,pp} | 150 | | 1200 | mVpp | |
| Transmit Disable Voltage | V _D | 2 | | V _{CC} | V | |
| Transmit Enable Voltage | V _{EN} | V _{ee} | | V _{ee} +0.8 | V | 3 |
| Receiver | | | | | | |
| Output differential impedance | R _{out} | | 100 | | Ω | 2 |
| Single ended data output swing | V _{out,pp} | 300 | | 700 | mV | 4 |



| | | | | | | |
|------------|------------------|-----|--|-----------------|---|---|
| LOS Fault | $V_{LOS\ fault}$ | 2 | | $V_{CC_{HOST}}$ | V | 5 |
| LOS Normal | $V_{LOS\ norm}$ | Vee | | Vee+0.8 | V | 5 |

Notes:

1. Module power consumption never exceeds 1.5W.
2. AC coupled.
3. Or open circuit.
4. Into 100 ohm differential termination.
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

Optical characteristics($T_{OP} = 0$ to $70^{\circ}C$, $V_{CC} = 3.0$ to 3.60 Volts)

(GBP-2733192-E6C, 1270 DFB & APD/TIA)

| Parameter | Symbol | Min. | Typical | Max | Unit | Ref. |
|------------------------------------|-----------------|---------------------------|---------|------|-------|------|
| Transmitter | | | | | | |
| Optical Wavelength | λ_c | 1260 | 1270 | 1280 | nm | |
| Side Mode Suppress Ratio | SMSR | 30 | | | dB | |
| Spectral Width(-20dB) | $\Delta\lambda$ | | | 1 | nm | |
| Average Output Power | P_{op} | 1 | | 5 | dBm | 1 |
| Extinction Ratio | ER | 3.5 | | | dB | |
| Eye Mask | | Compliant with IEEE 802.3 | | | | |
| Transmitter and Dispersion Penalty | TDP | | | 3.2 | dB | |
| Average Power of OFF Transmitter | | | | -30 | dBm | |
| Relative Intensity Noise | RIN | | | -128 | dB/Hz | |
| Receiver | | | | | | |
| Average Receiver Power | RSENS | | | -20 | dBm | 1,2 |
| Receiver Overload | P_{MAX} | | | -7 | dBm | |
| Centre Wavelength | λ_C | 1320 | | 1340 | nm | |
| LOS De-Assert | LOS_D | | | -25 | dBm | |
| LOS Assert | LOS_A | -28 | | | dBm | |
| LOS Hysteresis | | 0.5 | | | dB | |

Notes:

1. Average Receiver Power (Min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant.
2. Measured with a PRBS2³¹-1 test pattern @10.3125Gbps, BER $\leq 10^{-12}$

(GBP-3327192-E6C, 1330 DFB & APD/TIA)

| Parameter | Symbol | Min. | Typical | Max | Unit | Ref. |
|------------------------------------|-----------------|---------------------------|---------|------|-------|------|
| Transmitter | | | | | | |
| Optical Wavelength | λ_c | 1320 | 1330 | 1340 | nm | |
| Side Mode Suppress Ratio | SMSR | 30 | | | dB | |
| Spectral Width(-20dB) | $\Delta\lambda$ | | | 1 | nm | |
| Average Output Power | P_{op} | 1 | | 5 | dBm | 1,2 |
| Extinction Ratio | ER | 3.5 | | | dB | |
| Eye Mask | | Compliant with IEEE 802.3 | | | | |
| Transmitter and Dispersion Penalty | TDP | | | 3.2 | dB | |
| Average Power of OFF Transmitter | | | | -30 | dBm | |
| Relative Intensity Noise | RIN | | | -128 | dB/Hz | |
| Receiver | | | | | | |
| Average Receiver Power | RSENS | | | -20 | dBm | 2,3 |
| Receiver Overload | P_{MAX} | -7 | | | dBm | |
| Centre Wavelength | λ_C | 1260 | 1270 | 1280 | nm | |
| LOS De-Assert | LOS_D | | | -25 | dBm | |
| LOS Assert | LOS_A | -28 | | | dBm | |
| LOS Hysteresis | | 0.5 | | | dB | |

Notes:

1. Output is coupled into a 9/125um SMF.
2. Average Receiver Power (Min) is informative and not the principal indicator of signal strength. A received power below this value cannot be compliant.
3. Measured with a PRBS231-1 test pattern @10.3125Gbps, BER $\leq 10^{-12}$

Pin Descriptions

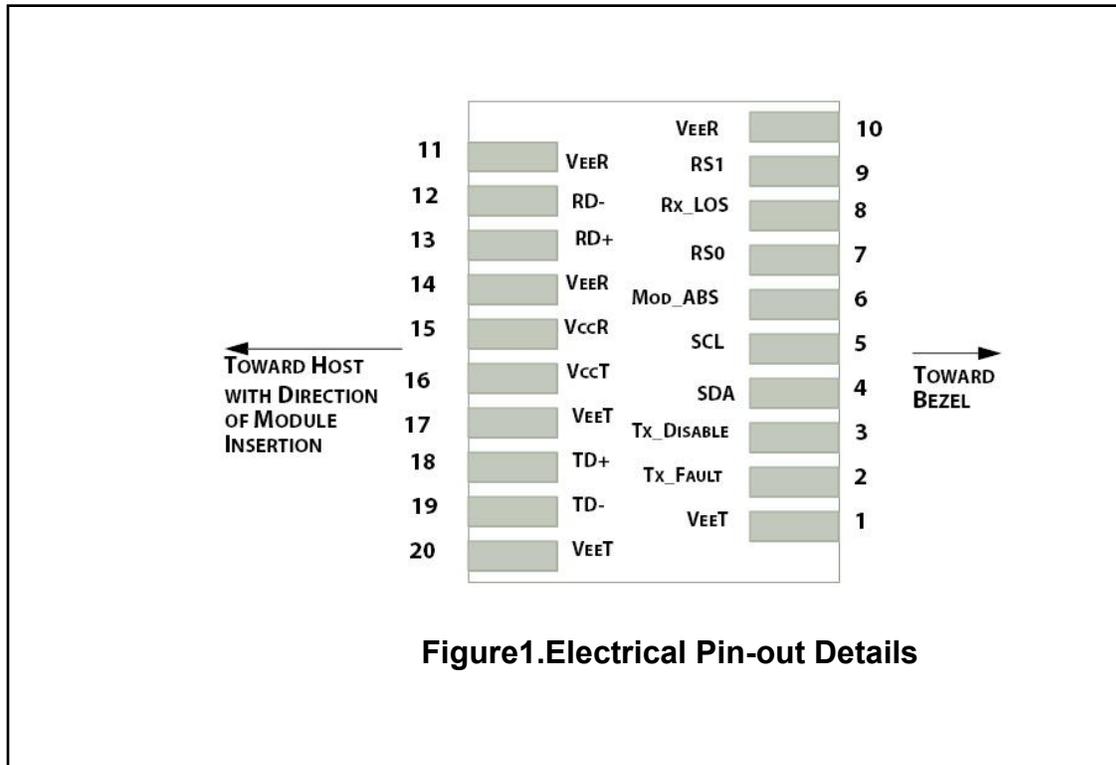


Figure1.Electrical Pin-out Details

| Pin | Symbol | Name/Description |
|-----|--------------|------------------------------------------------------------------------------------------------------------------|
| 1 | VEET [1] | Transmitter Ground |
| 2 | Tx_FAULT [2] | Transmitter Fault |
| 3 | Tx_DIS [3] | Transmitter Disable. Laser output disabled on high or open |
| 4 | SDA [2] | 2-wire Serial Interface Data Line |
| 5 | SCL [2] | 2-wire Serial Interface Clock Line |
| 6 | MOD_ABS [4] | Module Absent. Grounded within the module |
| 7 | RS0 [5] | RS0 for Rate Select: Open or Low = Module supports ≤4.25Gbps High = Module supports 9.95 Gb/s to 10.3125 Gb/s |
| 8 | RX_LOS [2] | Loss of Signal indication. Logic 0 indicates normal operation |
| 9 | RS1 [5] | No connection required |
| 10 | VEER [1] | Receiver Ground |

| | | |
|----|----------|------------------------------------------|
| 11 | VEER [1] | Receiver Ground |
| 12 | RD- | Receiver Inverted DATA out. AC Coupled |
| 13 | RD+ | Receiver DATA out. AC Coupled |
| 14 | VEER [1] | Receiver Ground |
| 15 | VCCR | Receiver Power Supply |
| 16 | VCCT | Transmitter Power Supply |
| 17 | VEET [1] | Transmitter Ground |
| 18 | TD+ | Transmitter DATA in. AC Coupled |
| 19 | TD- | Transmitter Inverted DATA in. AC Coupled |
| 20 | VEET [1] | Transmitter Ground |

Notes:


[1] Module circuit ground is isolated from module chassis ground within the module.

[2].should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.

[3]Tx_Disable is an input contact with a 4.7 kΩ to 10 kΩ pullup to VccT inside the module.

[4]Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range 4.7 kΩ to 10 kΩ. Mod_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.

[5] RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.

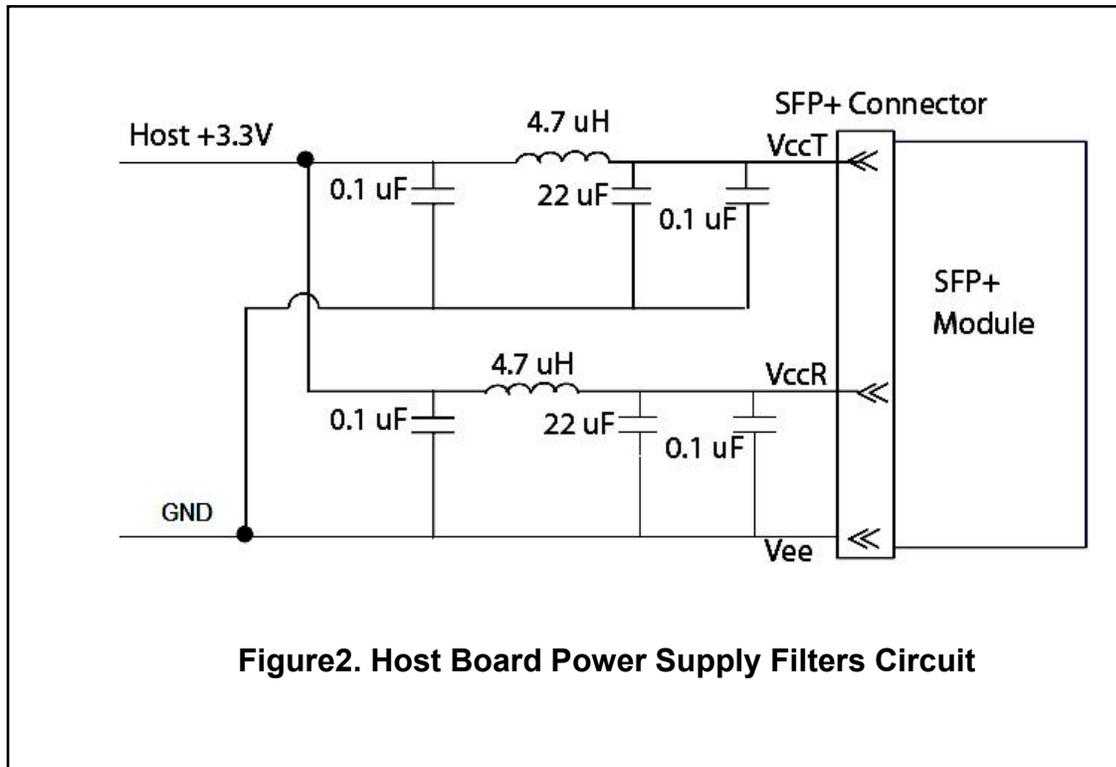

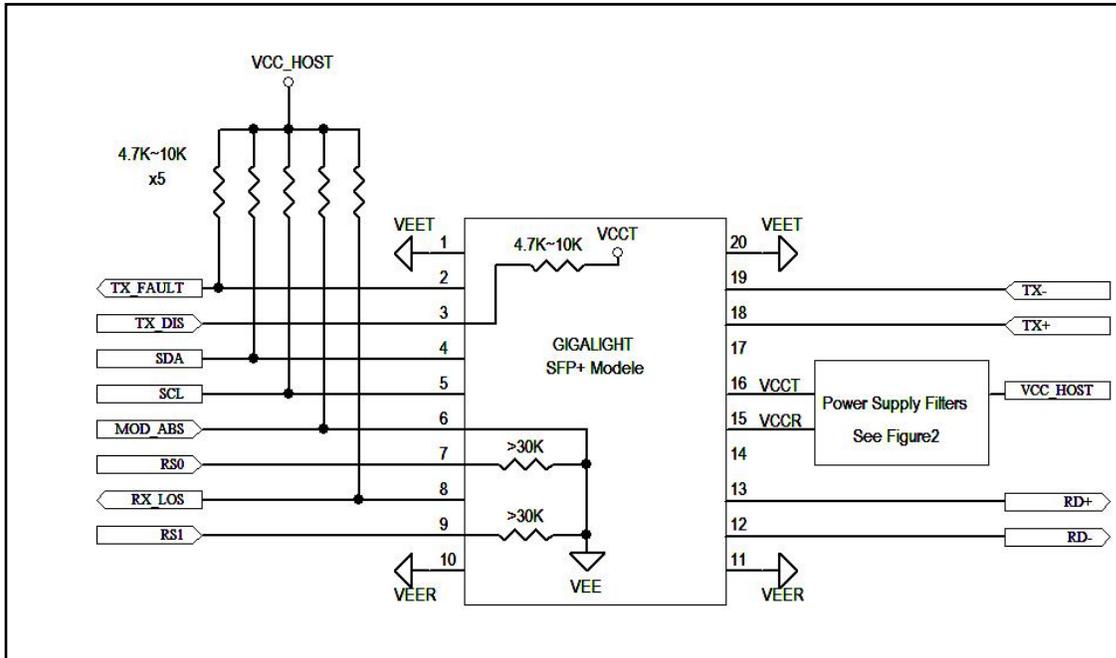


Figure3. Host-Module Interface

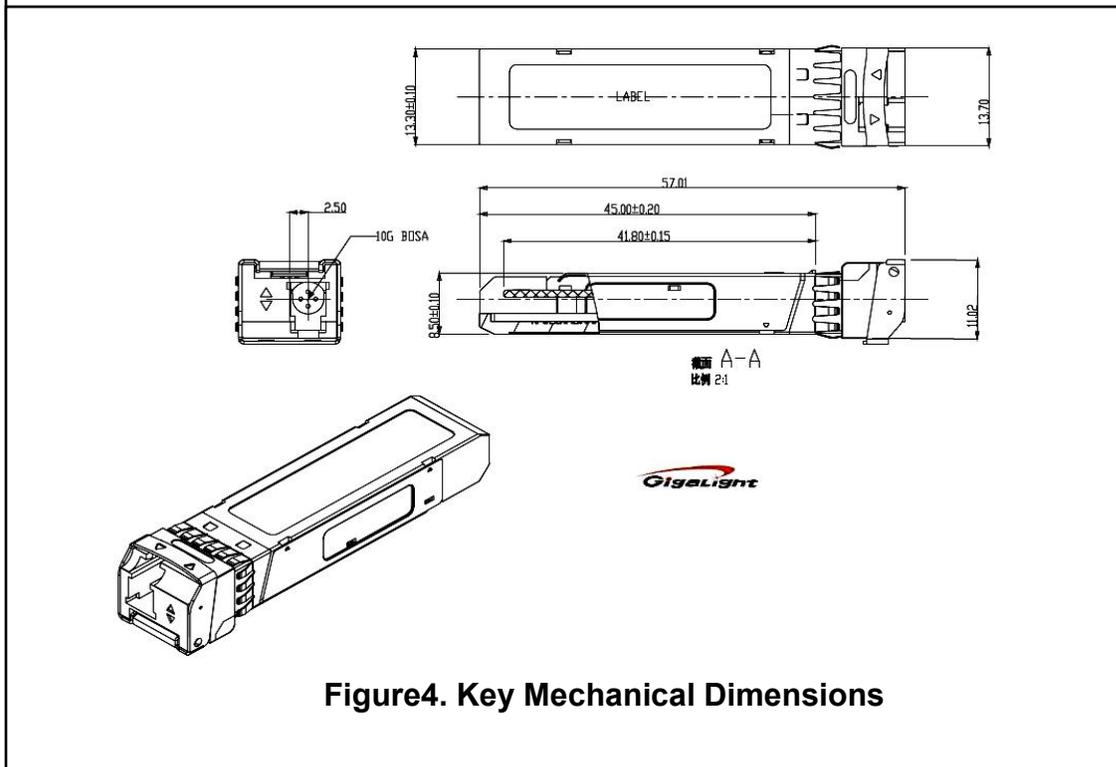


Figure4. Key Mechanical Dimensions



Ordering information

| Part Number | Product Description |
|-----------------|-------------------------------------------------------------------|
| GBP-2733192-E6C | BiDi SFP+, 10.3Gb/s, Tx 1270nm / Rx 1330nm, 60km, SMF, Simplex LC |
| GBP-3327192-E6C | BiDi SFP+, 10.3Gb/s, Tx 1330nm / Rx 1270nm, 60km, SMF, Simplex LC |

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by GIGALIGHT before they become applicable to any particular order or contract. In accordance with the GIGALIGHT policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of GIGALIGHT or others. Further details are available from any GIGALIGHT sales representative.

E-mail: sales@gigalight.com

Web : <http://www.gigalight.com/>